


ACD-SEO8K37-50 Card, SEOS, 8K, 37bit, 50pcs

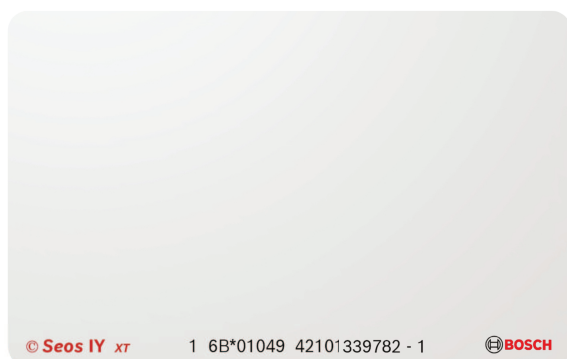

- ▶ Credit card size
- ▶ Imprinted card number
- ▶ Seos chip
- ▶ 8 KB for standard applications
- ▶ Fully supported by the LECTUS secure readers

Seos cards have a wire antenna and a Seos chip embedded. LECTUS secure readers fully support the Seos cards. The card is recognized and read when held in front of the reader. With 8 Kbytes memory, the card is suitable for standard applications. The reading process is passive with a frequency of 13.56 MHz.

Installation/configuration notes

Contactless credentials with Seos chip are ideal for installations with high-availability systems.

Parts included

Quantity	Component
50	Cards

Technical specifications

Environmental

Operating temperature (°C)	-40 °C – 70 °C
Operating temperature (°F)	-40 °F – 158 °F

Mechanical

Material	PVC; PET
Dimensions (H x W x D) (mm)	54 mm x 85.73 mm x 0.84 mm
Dimensions (H x W x D) (in)	2.13 in x 3.38 in x 0.03 in
Weight (g)	5.50 g
Weight (oz)	0.20 oz

Operation

Chip write endurance (writing cycles)	500,000
Data preservation (years)	20 years
Reading format	Seos

Ordering information

ACD-SEO8K37-50 Card, SEOS, 8K, 37bit, 50pcs
 Card, Seos, 8K, 37bit, 50pcs
 Order number **ACD-SEO8K37-50 | F.01U.405.140**

Represented by:

Europe, Middle East, Africa:
 Bosch Security Systems B.V.
 P.O. Box 80002
 5600 JB Eindhoven, The Netherlands
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com

Germany:
 Bosch Sicherheitssysteme GmbH
 Robert-Bosch-Platz 1
 D-70839 Gerlingen
www.boschsecurity.com

North America:
 Bosch Security Systems, LLC
 130 Perinton Parkway
 Fairport, New York, 14450, USA
www.boschsecurity.com

Asia-Pacific:
 Robert Bosch (SEA) Pte Ltd, Security Systems
 11 Bishan Street 21
 Singapore 573943
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com