


DCNM-FPT Flush positioning tools

DICENTIS

▶ Allows to easily position flush-mounted devices

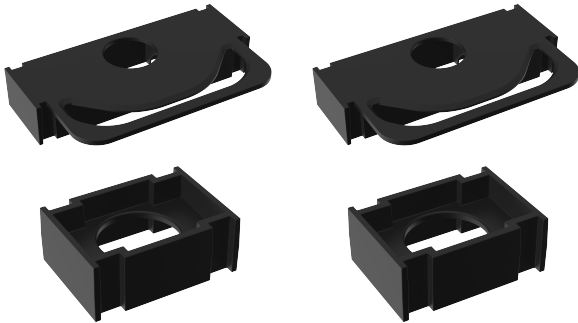

These tools enable the flush mount elements to be easily positioned. The cut-out for the loudspeaker can be easily drawn with the template added to the positioning tools.

Parts included

Quantity	Component
2	DCNM-FPT Flush positioning tools

Technical specifications

Mechanical

Weight (g)	40 g
Weight (lb)	0.09 lb
Color in RAL	RAL 9017 Traffic black

Environmental

According to IEC 60721: storage (1K3), transportation (2K2) and operational (3K4).

Transportation temperature (°C)	-30 °C – 70 °C
Transportation temperature (°F)	-22 °F – 158 °F

Storage temperature (°C)	-5 °C – 45 °C
Storage temperature (°F)	23 °F – 113 °F
Operating relative humidity, non-condensing (%)	5% – 90%

Ordering information

DCNM-FPT Flush positioning tools

Positioning tools (2 sets) for flush mount couplings.
Order number **DCNM-FPT | F.01U.393.974**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com

North America:
Bosch Security Systems, LLC
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.us

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
apr.securitysystems@bosch.com
www.boschsecurity.asia