

DCNM-MICL Microphone with long stem

DICENTIS



- ▶ Uni-directional microphone on adjustable stem
- ▶ Built-in plop and windshield
- ▶ Low susceptible for mobile phones
- ▶ For acoustical challenging rooms
- ▶ For locations where people want to speak standing upright

The innovative, stylish and ergonomically designed microphone with adjustable stem has a uni directional response for optimum performance, even in noisy conditions or acoustical challenging rooms. It has low susceptibility to interference from mobile phones.

Functions

Controls and indicators

- Red or green illuminator. Red indicates microphone active, green indicates request for speech accepted.

Interconnections

- Connector to plug and fasten the microphone.

Certifications and approvals

Region	Regulatory compliance/quality marks	
Europe	CE	DECL_CE_DCNM-MICL

Installation/configuration notes

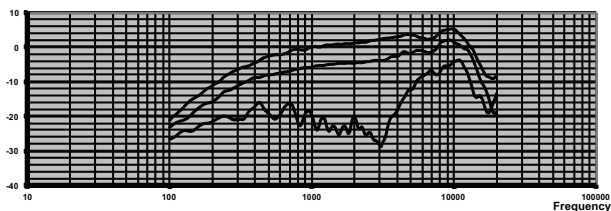
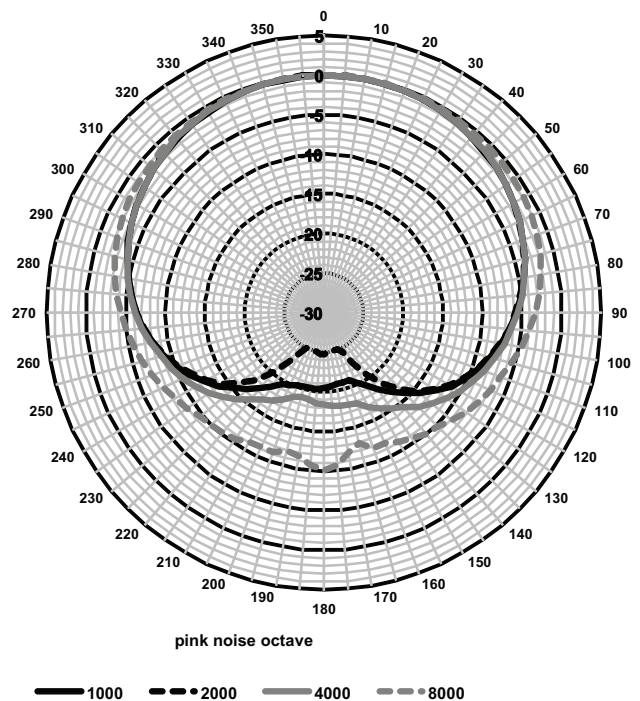


Fig. 1: Frequency response (Opening angle: 0, 90 and 180 degrees)



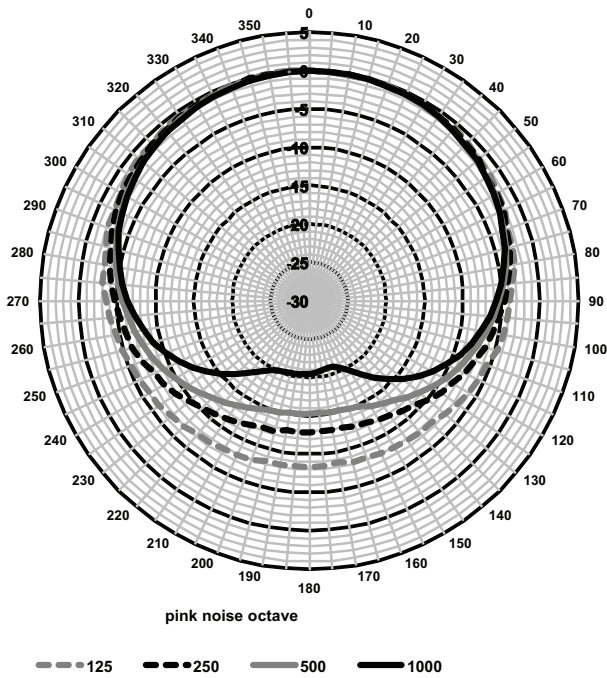


Fig. 2: Polar diagram (measured with pink noise)

Parts included

Quantity	Component
1	DCNM-MICL DICENTIS Long Stem Microphone

Technical specifications

Electrical

Power supply	5 VDC
Power consumption	0.1 W
Bandwidth	125 Hz - 15 kHz
Dynamic range	>100 dB
Nominal input	85 dB SPL
Maximum input	115 dB SPL
Equivalent noise	15 dB SPL

Mechanical

Mounting	Plug and fasten into DICENTIS device and DICENTIS Wireless Devices.
Length	480 mm (19.90 in)
Connector	77.15 x 60.47 mm (3.40 x 2.38 in)
Weight	108 g (0.24 lb)
Color:	Pearl light grey RAL 9022

Environmental

Operating temperature	0 °C to +45 °C (32 °F to +113 °F)
Storage and transport temperature	-20 °C to +70 °C (-4 °F to +158 °F)
Relative humidity	< 95 %, > 5%

Ordering information

DCNM-MICL Microphone with long stem

DICENTIS long stem microphone for the DICENTIS Conference System or DICENTIS Wireless Conference System.

Order number **DCNM-MICL | F.01U.288.447**

Services

EWE-DCNMIC-IW 12mths wrty ext DICENTIS Microphone

12 months warranty extension

Order number **EWE-DCNMIC-IW | F.01U.348.764**

Represented by:

Europe, Middle East, Africa:
 Bosch Security Systems B.V.
 P.O. Box 80002
 5600 JB Eindhoven, The Netherlands
 Phone: + 31 40 2577 284
 emea.securitysystems@bosch.com
 emea.boschsecurity.com

Germany:
 Bosch Sicherheitssysteme GmbH
 Robert-Bosch-Ring 5
 85630 Grasbrunn
 Germany
 www.boschsecurity.com

North America:
 Bosch Security Systems, LLC
 130 Perinton Parkway
 Fairport, New York, 14450, USA
 Phone: +1 800 289 0096
 Fax: +1 585 223 9180
 onlinehelp@us.bosch.com
 www.boschsecurity.us

Asia-Pacific:
 Robert Bosch (SEA) Pte Ltd, Security Systems
 11 Bishan Street 21
 Singapore 573943
 Phone: +65 6571 2808
 Fax: +65 6571 2699
 apr.securitysystems@bosch.com
 www.boschsecurity.asia