


## DSA E-Series E2800 60-bay

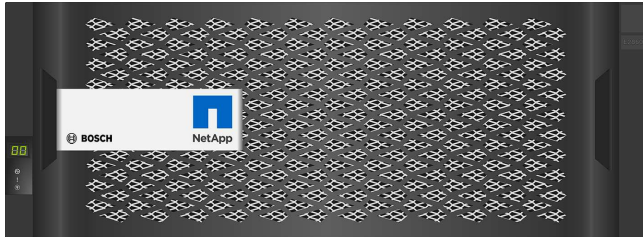

- ▶ Scale-up network storage solution: controller unit with 60 internal HDDs expandable via state-of-the-art SAS interface-connected expansion units
- ▶ Configurable hardware-based RAID/DDP protection (RAID-5, RAID-6 or DDP) for highest system performance
- ▶ Redundant hot-swappable power supplies and cooling fans
- ▶ Two 10 Gigabit Ethernet ports for highest speed iSCSI connectivity
- ▶ Fully modular design for ease of service and protected by NetApp services, including a 3 years next business day on-site support

DSA E2800 represents the next generation of DSA E-Series, the iSCSI-based digital video disk arrays by Bosch. They are state-of-the-art platforms designed for the security industries most demanding digital video storage applications to manage relentlessly growing digital video data.

### System overview

DSA E2800 is based on a 4U dual controller unit with 60 internal 3.5", 7.2 K, NL-SAS (Serial Attached SCSI), enterprise HDDs (Nearline SAS) for high-capacity and extreme performance requirements.

This storage system is a high-performance solution designed with robust flexibility that makes it a great fit for wide-ranging video surveillance requirements. Its balanced performance is designed for supporting high bandwidth and I/O intensive workloads. The DSA E2800 fully redundant I/O paths, advanced protection features, and extensive diagnostic capabilities deliver high levels of availability, integrity, and security.

### Functions

DSA E2800 is the co-branded E2800 series from NetApp. It is a scale-up network storage solution that provides security, highest "in-the-box" scalability, peace-of-mind data protection, and simplified management of all your video data.

DSA E2800 60-bay dual controller configuration allows connecting up to two 60-bay expansion units (60 x HDDs per expansion shelf) connected to one dual controller base unit.

It is a fully featured hardware RAID/DDP protected disk array which provides RAID-5 protection for capacity-oriented environments and RAID-6/DDP protection for availability-oriented environments.

### High reliability and availability

DSA E2800 keeps your data safe and available with redundant hot-swappable power supplies and fans, and protects from double-disk failure and single bit errors during rebuilds with high performance RAID-6 or DDP.

Its redundant components, automated path failover, and online administration keep organizations productive 24 x 7 x 365.

Further high-availability features include:

- Automatic drive failover and detection and rebuild if using global hot spare drives
- Data cache with battery backup and de-stage to flash
- **SANtricity** proactive drive health monitoring identifies problem drives before they create issues

### Monitoring

Full SNMP support with MIB-II and NetApp custom MIBs is provided. In case of component failures SNMP, e-mail alert notifications will be generated. Additionally, an event monitor for sending alert notifications to a central major event log is available. If the device is connected to the Internet/Intranet automatically generated **AutoSupport** messages can be sent, which helps to prevent issues before they occur.

### Management

NetApp SANtricity storage management software combines robustness and ease of use. With its dynamic capabilities, SANtricity software supports on-the-fly expansion, reconfiguration, and maintenance without interrupting storage system I/O.

### Transceiver modules

Dual controller system	4x 10GBASE-SR SFP (mini-GBIC, 850NM) transceiver module - IEEE 802.3ae -10Gb iSCSI - OM3 and OM4 support - LC-Duplex connection
------------------------	---

### Regulatory information

Region	Regulatory compliance/quality marks	
Europe	CE	DoC DSA E-Series (E2800 60-bay)

### Installation/configuration notes

Bosch provides the necessary software tools for an initial setup of the storage in a video surveillance environment. In addition, the system provides web based configuration and a powerful Command Line Interface (CLI) which is fully remote accessible by SSH (Secure Shell).

In dual controller systems the iSCSI ports with the same number are tied together for redundancy purpose, while one of the ports is a fall-back path for an iSCSI port on the other controller.

### Net capacity

The net capacity available is shown in the following tables:

Configuration Information (RAID-5)	Net Capacity (GB)
60-bay unit (60 x 4 TB)	204820
60-bay unit (60 x 8 TB)	409640
60-bay unit (60 x 12 TB)	614460

Configuration Information (RAID-6)	Net Capacity (GB)
60-bay unit (60 x 4 TB)	186200
60-bay unit (60 x 8 TB)	372400
60-bay unit (60 x 12 TB)	558600

Configuration Information (DDP)	Net Capacity (GB)
60-bay unit (60 x 4 TB)	156408
60-bay unit (60 x 8 TB)	312816
60-bay unit (60 x 12 TB)	469224

### Performance data

Performance data per controller unit in a 10 Gbit/s network (in a 1 Gbit/s network the available network bandwidth is the limiting factor):

Network Uplink 10 GbE			
	IP cameras	RAID-5/6 Bandwidth Mbps (write / read)	DDP Bandwidth Mbps (write / read)
Dual port	800 (400 per port)	1250 / 250	1150 / 250

#### **i** Notice

Number of IP cameras refers to default software configuration (no direct replay mode).

#### **i** Notice

DSA E2800 dual controller systems require Bosch camera firmware version 6.43 and later, VRM Video Recording Manager version 3.71 and later, and Configuration Manager version 5.53 and later.

#### **i** Notice Hardware warranty

The next business day on-site service level can only be provided if the respective system has been registered immediately after receipt and installation. Otherwise, service will be provided based on best effort basis. Information about registration details is available in every shipment (registration form) or from the Bosch online product catalog. Next business day services cannot be provided in every country everywhere. For limitations and exceptions see the registration details in the registration form.

**i Notice**

If the diagnostic cable supplied with the product is no longer available, please order a new one via the Bosch After-Sales organization (order number: F.01U.323.853).

**i Notice**

Do not use any other accessories than specified in the data sheet!

**Technical specifications****Electrical requirements 60-bay controller units**

Parameter	Low range	High range
Nominal voltage	200 VAC	240 VAC
Frequency	50 Hz	60 Hz
Typical operating current	6.0 A	5.0 A
Maximum operating current	7.0 A	5.8 A
System rating plate label	9.98 A	9.98 A

**Electrical requirements 60-bay expansion units**

Parameter	Low range	High range
Nominal voltage	200 VAC	240 VAC
Frequency	50 Hz	60 Hz
Typical operating current	5.2 A	4.3 A
Maximum operating current	6.0 A	5.4 A
System rating plate label	9.98 A	8.32 A

**Power ratings (typical operating power)**

KVA	1.05
Watts	1022
BTU/h	3495

**Note:** For detailed information, see the latest NetApp E-Series Site Preparation Guide.

**Mechanical****Dimensions (H x W x D)****Mechanical**

• 60-bay unit	17.44 x 44.85 x 97.15 cm (6.87 x 17.66 x 38.25 in)
• Shipping carton	68.8 x 68.3 x 117.6 cm (27.1 x 26.9 x 46.3 in)

**Weight**

• Maximum weight controller unit	113.0 kg (249.12 lb)
• Maximum weight expansion unit	112.2 kg (247.4 lb)
• Maximum shipping weight	147.1 kg (324.3 lb)

**Space requirements**

Front clearance (cooling and maintenance)	81.2 cm (32.0 in)
Rear clearance (cooling and maintenance)	60.9 cm (24.0 in)

**Environmental****Temperature**

• Operating range (both cabinet and subsystem)	+10 °C to +40 °C (+50 °F to +104 °F)
• Storage range	0 °C to +70 °C (+32 °F to +158 °F)

**Relative humidity (non-condensing)**

• Operating range (both cabinet and subsystem)	20 to 80%
• Storage range	5 to 95%

**Altitude**

• Operating range	30.5 m (100 ft) below sea level to 3000 m (9842 ft) above sea level
• Storage range	30.5 m (100 ft) below sea level to 12,192 m (40,000 ft) above sea level

**Acoustic noise**

• Sound power controller unit (standby operation)	72 dB
• Sound pressure (normal operation)	72 dBA

**Trademarks:**

NetApp, AutoSupport, and SANtricity are registered trademarks of NetApp, all rights reserved. All data and dimensions are referenced from the NetApp Site Preparation Guide and from the NetApp Website and are subject to change without notice.

**Notes:**

General technical information for the RAID systems are provided in the NetApp E-Series Site Preparation Guide, available under:

[https://library.netapp.com/ecm/ecm\\_download\\_file/ECMLP2773645](https://library.netapp.com/ecm/ecm_download_file/ECMLP2773645)

**Ordering information****DSA-N6C8X4-60AT Dual controller unit 60x4TB**

High-performance and high-capacity storage system base unit with iSCSI disk arrays, dual controller.

DSA E2800, 60 x 4 TB HDD

NDAA compliant

Order number **DSA-N6C8X4-60AT | F.01U.346.475**

**DSA-N6C8X8-60AT Dual controller unit 60x8TB**

High-performance and high-capacity storage system base unit with iSCSI disk arrays, dual controller.

DSA E2800, 60 x 8 TB HDD

NDAA compliant

Order number **DSA-N6C8X8-60AT | F.01U.346.480**

**DSA-N6C8XC-60AT Dual Controller Unit 60x12TB**

High-performance and high-capacity storage system base unit with iSCSI disk arrays, dual controller.

DSA E2800, 60 x 12 TB HDD

NDAA compliant

Order number **DSA-N6C8XC-60AT | F.01U.361.548**

**DSX-N6D8X4-60AT Expansion unit 60x4TB**

High-performance and high-capacity storage expansion unit with iSCSI disk arrays for DSA E2800.

60 x 4 TB HDD

NDAA compliant

Order number **DSX-N6D8X4-60AT | F.01U.346.476**

**DSX-N6D8X8-60AT Expansion unit 60x8TB**

High-performance and high-capacity storage expansion unit with iSCSI disk arrays for DSA E2800.

60 x 8 TB HDD

NDAA compliant

Order number **DSX-N6D8X8-60AT | F.01U.346.481**

**DSX-N6D8XC-60AT Expansion Unit 60x12TB**

High-performance and high-capacity storage expansion unit with iSCSI disk arrays for DSA E2800.

60 x 12 TB HDD

NDAA compliant

Order number **DSX-N6D8XC-60AT | F.01U.361.546**

**Accessories****DSX-NRCK40-INT8 Rack empty 40U**

Empty rack for DSA E2800 60-bay units.

Order number **DSX-NRCK40-INT8 | F.01U.348.894**

**DSX-WDTK8-4TB HDD 4TB for 60bay**

Hard disk storage expansion with a capacity of 4 TB. For DSA E2800 60-bay expansion units.

Order number **DSX-WDTK8-4TB | F.01U.346.488**

**DSX-WDTK8-8TB HDD 8TB for 60bay**

Hard disk storage expansion with a capacity of 8 TB. For DSA E2800 60-bay expansion units.

Order number **DSX-WDTK8-8TB | F.01U.346.490**

**DSX-WDTK8-12TB HDD 12TB for 60bay**

Hard disk storage expansion with a capacity of 12 TB. For DSA E2800 60-bay expansion units.

Order number **DSX-WDTK8-12TB | F.01U.361.544**

**Services****EWE-S6D8X48-SLP DSA E2860 4-8TB SES Ext 1yr IW**

Next business day on-site service extension for one additional (4<sup>th</sup> or 5<sup>th</sup>) year, applicable to DSA E2800 60-bay with 4-8TB HDDs, if purchased during warranty period

Order number **EWE-S6D8X48-SLP | F.01U.349.801**

**EWE-S6D8X48-4PR DSA E2860 4-8TB 4h Prt Rpl 1yr IW**

4 hour part replacement service extension for one year, applicable to DSA E2800 60-bay with 4-8TB HDDs, if purchased during warranty period.

Order number **EWE-S6D8X48-4PR | F.01U.349.802**

**EWE-S6D8X48-NRD DSA E2860 4-8TB Non Ret DO 1yr IW**

Non-returnable disk service extension for one year, applicable to DSA E2800 60-bay with 4-8TB HDDs, if purchased during warranty period.

Order number **EWE-S6D8X48-NRD | F.01U.349.803**

**EWE-S6D8X48-SLP DSA E2860 4-8TB SES Ext 1yr IW**

Next business day on-site service extension for one additional (4<sup>th</sup> or 5<sup>th</sup>) year, applicable to DSA E2800 60-bay with 4-8TB HDDs, if purchased during warranty period

Order number **EWE-S6D8X48-SLP | F.01U.349.801**

**EWE-S6D8X48-4PR DSA E2860 4-8TB 4h Prt Rpl 1yr IW**

4 hour part replacement service extension for one year, applicable to DSA E2800 60-bay with 4-8TB HDDs, if purchased during warranty period.

Order number **EWE-S6D8X48-4PR | F.01U.349.802**

**EWE-S6D8X48-NRD DSA E2860 4-8TB Non Ret DO 1yr IW**

Non-returnable disk service extension for one year, applicable to DSA E2800 60-bay with 4-8TB HDDs, if purchased during warranty period.

Order number **EWE-S6D8X48-NRD | F.01U.349.803**

**EWE-S6D8XAC-SLP DSA E2860 10-12TB SES Ext 1yr IW**

Next business day on-site service extension for one additional (4<sup>th</sup> or 5<sup>th</sup>) year, applicable to DSA E2800 60-bay with 10-12TB HDDs, if purchased during warranty period

Order number **EWE-S6D8XAC-SLP | F.01U.349.804**

**EWE-S6D8XAC-4PR DSA E2860 10-12TB 4h Prt Rpl 1yr IW**

4 hour part replacement service extension for one year, applicable to DSA E2800 60-bay with 10-12TB HDDs, if purchased during warranty period.

Order number **EWE-S6D8XAC-4PR | F.01U.349.805**

**EWE-S6D8XAC-NRD DSA E2860 10-12TB Non Ret DO 1yr IW**

Non-returnable disk service extension for one year, applicable to DSA E2800 60-bay with 10-12TB HDDs, if purchased during warranty period.

Order number **EWE-S6D8XAC-NRD | F.01U.349.806**

**EWE-S6D8X48-SLP DSA E2860 4-8TB SES Ext 1yr IW**

Next business day on-site service extension for one additional (4<sup>th</sup> or 5<sup>th</sup>) year, applicable to DSA E2800 60-bay with 4-8TB HDDs, if purchased during warranty period

Order number **EWE-S6D8X48-SLP | F.01U.349.801**

**EWE-S6D8X48-4PR DSA E2860 4-8TB 4h Prt Rpl 1yr IW**

4 hour part replacement service extension for one year, applicable to DSA E2800 60-bay with 4-8TB HDDs, if purchased during warranty period.

Order number **EWE-S6D8X48-4PR | F.01U.349.802**

**EWE-S6D8X48-NRD DSA E2860 4-8TB Non Ret DO 1yr IW**

Non-returnable disk service extension for one year, applicable to DSA E2800 60-bay with 4-8TB HDDs, if purchased during warranty period.

Order number **EWE-S6D8X48-NRD | F.01U.349.803**

**EWE-S6D8X48-SLP DSA E2860 4-8TB SES Ext 1yr IW**

Next business day on-site service extension for one additional (4<sup>th</sup> or 5<sup>th</sup>) year, applicable to DSA E2800 60-bay with 4-8TB HDDs, if purchased during warranty period

Order number **EWE-S6D8X48-SLP | F.01U.349.801**

**EWE-S6D8X48-4PR DSA E2860 4-8TB 4h Prt Rpl 1yr IW**

4 hour part replacement service extension for one year, applicable to DSA E2800 60-bay with 4-8TB HDDs, if purchased during warranty period.

Order number **EWE-S6D8X48-4PR | F.01U.349.802**

**EWE-S6D8X48-NRD DSA E2860 4-8TB Non Ret DO 1yr IW**

Non-returnable disk service extension for one year, applicable to DSA E2800 60-bay with 4-8TB HDDs, if purchased during warranty period.

Order number **EWE-S6D8X48-NRD | F.01U.349.803**

**EWE-S6D8XAC-SLP DSA E2860 10-12TB SES Ext 1yr IW**

Next business day on-site service extension for one additional (4<sup>th</sup> or 5<sup>th</sup>) year, applicable to DSA E2800 60-bay with 10-12TB HDDs, if purchased during warranty period

Order number **EWE-S6D8XAC-SLP | F.01U.349.804**

**EWE-S6D8XAC-4PR DSA E2860 10-12TB 4h Prt Repl 1yr IW**

4 hour part replacement service extension for one year, applicable to DSA E2800 60-bay with 10-12TB HDDs, if purchased during warranty period.

Order number **EWE-S6D8XAC-4PR | F.01U.349.805**

**EWE-S6D8XAC-NRD DSA E2860 10-12TB Non Ret DO 1yr IW**

Non-returnable disk service extension for one year, applicable to DSA E2800 60-bay with 10-12TB HDDs, if purchased during warranty period.

Order number **EWE-S6D8XAC-NRD | F.01U.349.806**

**Represented by:**

**Europe, Middle East, Africa:**  
Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
Phone: + 31 40 2577 284  
[www.boschsecurity.com/xc/en/contact/](http://www.boschsecurity.com/xc/en/contact/)  
[www.boschsecurity.com](http://www.boschsecurity.com)

**Germany:**  
Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Ring 5  
85630 Grasbrunn  
Tel.: +49 (0)89 6290 0  
Fax: +49 (0)89 6290 1020  
[de.securitysystems@bosch.com](mailto:de.securitysystems@bosch.com)  
[www.boschsecurity.com](http://www.boschsecurity.com)

**North America:**  
Bosch Security Systems, LLC  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
Phone: +1 800 289 0096  
Fax: +1 585 223 9180  
[onlinehelp@us.bosch.com](mailto:onlinehelp@us.bosch.com)  
[www.boschsecurity.com](http://www.boschsecurity.com)

**Asia-Pacific:**  
Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
Phone: +65 6571 2808  
Fax: +65 6571 2699  
[www.boschsecurity.com/xc/en/contact/](http://www.boschsecurity.com/xc/en/contact/)  
[www.boschsecurity.com](http://www.boschsecurity.com)