

ISC-BPQ2-W12 PIR Motion detector, 40ft (12m)

Blue Line Gen2 Quad



- ▶ Dynamic Temperature Compensation – superior catch performance in any environment
- ▶ Wall to Wall Coverage – superior catch performance
- ▶ Flexible Mounting Height, No Adjustments – reduce installation time and false alarms, improve catch performance
- ▶ Self-locking Enclosure with Integrated Bubble Level – reduce installation time

The Blue Line Gen2 Quad PIR Detector (ISC-BPQ2-W12) uses two individual sensors that operate like two PIRs in one detector. Each sensor processes signals separately. Both must activate to generate an alarm signal. This improves false alarm immunity relative to a standard PIR, because false alarm sources such as noise spikes and small animals are ignored.

Quad detectors also provide superior catch performance versus a standard PIR or dual-technology detector. They are particularly well suited for challenging installation situations; for example, cases where cross catch of intruders cannot be guaranteed or where intruders are able to cross the detection pattern very quickly.

System overview

Functions

First Step Processing (FSP)

First Step Processing (FSP) almost instantly responds to human targets without producing false alarms from other sources. FSP adjusts the detector's sensitivity based on signal amplitude, polarity, slope, and timing. This eliminates the need for the installer to select the sensitivity level, thus improving ease of installation and reliability.

Dynamic Temperature Compensation

The detector intelligently adjusts its sensitivity to maintain its ability to identify human intruders at virtually any temperature.

Wall-to-Wall Coverage

An improved lookdown zone and coverage range of 12 m x 12 m (40 ft x 40 ft) provide wall-to-wall coverage.

Self-locking Enclosure

The sliding self-locking enclosure has an integrated bubble level and custom gap-free, lift-gate style terminal blocks to make installation easier.

Sealed Optics and Electronics

The optics and electronics are assembled into the front enclosure and sealed with a protective cover to prevent damage during installation. The sealed optical chamber also prevents drafts and insects from affecting the detector.

Test Features

Externally visible alarm LED can be disabled after installation.

Regulatory information

This detector is also designed to comply with the following:


Europe	Complies with EN50131-2-2 Grade 2
	Complies with EN50130-5 Class II
	Complies with EN60529, EN50102 (IP30, IK04)

Complies with Directive 2002/95/EC - Restriction of the use of certain Hazardous Substances (RoHS)

Region	Regulatory compliance/quality marks	
Europe	CE	EMC, LVD, RoHS [ISC-BPQ2-W12]
	EN50131	EN50131-2-2 [ISC-BPQ2-W12]
USA	UL	
	UL	20190115; UL639 – Standard for Intrusion-Detection Units
Canada	ULC	
	ULC	CAN/ULC S306-03 - Canadian Standard for Intrusion Detection Units
Belgium	INCERT	B-B09-1008 V b
	INCERT	B-509-0051
France	AFNOR	2620200002A1
	AFNOR	N2620200002A0 ISC-BPQ2-W12
the Netherlands	NCP	[ISC-BPR2-W12, ISC-BPR2-WP12, ISC-BPQ2-W12, ISC-BDL2-W12G, ISC-BDL2-WP12G, ISC-BDL2-WP6G]
Norway	FG	[ISC-BPR2-W12, ISC-BPQ2-W12, ISC-BPR2-WP12, ISC-BLD2-WP6, ISC-BDL2-W12, ISC-BDL2-WP12]
Sweden	INTYG	16-667 [ISC-BPQ2-W12]

Installation/configuration notes

Coverage Patterns

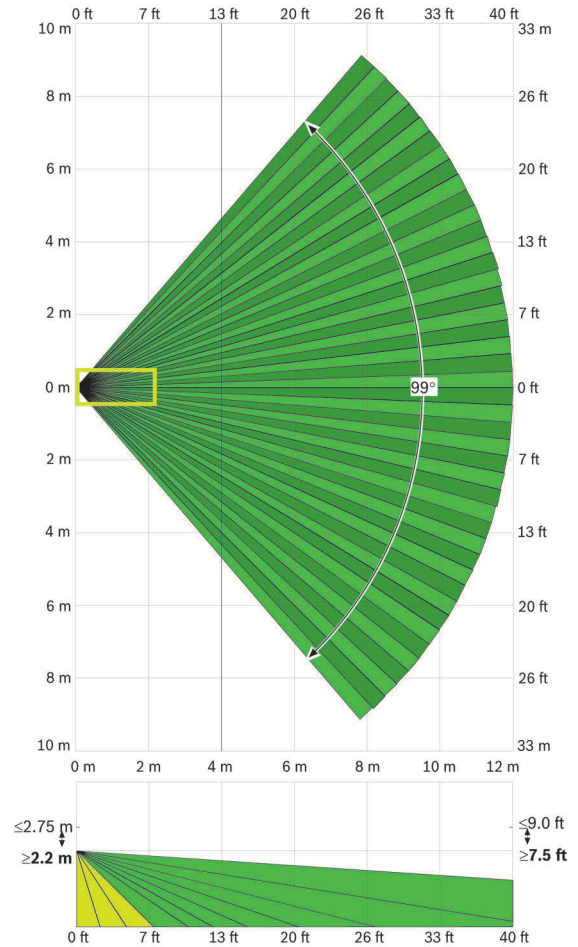

12 m x 12 m (40 ft x 40 ft) coverage

Mounting

The recommended mounting height is 2.2 m to 2.75 m (7.5 ft to 9 ft) with no adjustments required. Mount the motion detector level, both horizontally and vertically.

Mounting options:

- On a flat wall (surface, semi-flush), with the optional B335-3 Swiveling low-profile mount, or with the optional B328 Gimbal-mount Bracket
- In a corner (the junction of two perpendicular walls)
- On the ceiling with the optional B338 Universal Ceiling-mount Bracket

Parts included

Quantity	Component
1	Detector
1	Hardware pack <ul style="list-style-type: none"> • 2 anchors (#6, #8 x 7/8)

Quantity	Component
	<ul style="list-style-type: none"> 2 screws(#6 x 1.25) 1 cable tie (2.5 mm)
1	Literature pack

Technical specifications

Electrical

Current (alarm/standby):	10 mA at 12 VDC
Voltage (operating):	9 VDC to 15 VDC

Environmental

Environment:	Complies with EN50130-5 Class II
Relative Humidity:	0 to 95%, non-condensing <i>For UL Listed product installations,</i> 0 to 85%, non-condensing
Temperature (operating):	-30°C to +55°C (-20°F to +130°F) <i>For UL Listed product installations, 0°C to +49°C (+32°F to +120°F)</i>

Mechanical

Color:	white
Dimensions:	105 mm x 61 mm x 44 mm (4.2 in. x 2.4 in. x 1.7 in.)
Material:	High-impact ABS plastic
Radio Frequency Interference (RFI) Immunity	No alarm or setup on critical frequencies in the range from 150 kHz to 2 GHz at field strengths less than 30 V/m.

Outputs

Relay:	Solid state, supervised, Form A normally-closed (NC) contacts rated for ≤100 mA, 25 VDC, 2.5 W, <20 Ω closed
--------	--

Tamper:	Normally-closed (NC) contacts (with cover on) rated for ≤100 mA, 25 VDC, 2.5 W Connect tamper circuit to 24-hour protection circuit.
---------	---

Ordering information

ISC-BPQ2-W12 PIR Motion detector, 40ft (12m)

Provides PIR, 12 m x 12 m (40 ft x 40 ft) coverage, utilizing two PIR sensors in one motion detector.

Order number **ISC-BPQ2-W12 | F.01U.134.144**

F.01U.364.871 F.01U.399.654 F.01U.413.361

Accessories

B328 Mounting bracket, gimbal

Mounts on a single-gang box and allows rotation of a detector. Wires are hidden inside.

Order number **B328 | 4.998.800.277**

B335-3 Mounting bracket, swivel, low profile

Swiveling, low-profile, universal bracket for wall mounting. The vertical swivel range is +10° to -20°, while the horizontal swivel range is ±25°.

Order number **B335-3 | 4.998.800.014**

B338 Mounting bracket, ceiling, universal

Swiveling universal bracket for ceiling mounting. The vertical swivel range is +7° to -16°, while the horizontal swivel range is ±45°.

Order number **B338 | 4.998.800.282**



<https://www.boschsecurity.com>