




1 |

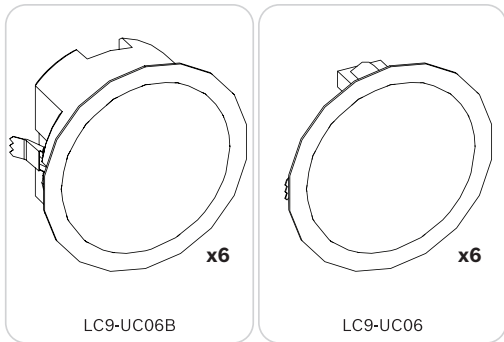


2 |

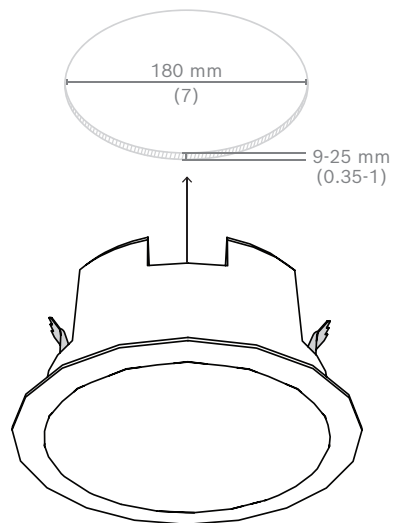

3 |




LC9-UC06B

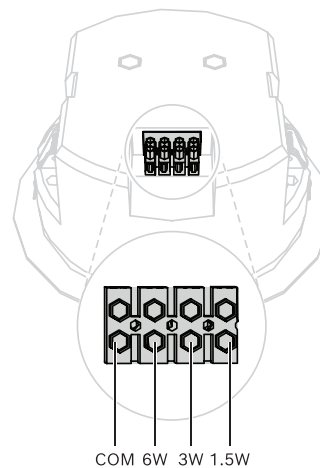


4 |




LC9-UC06

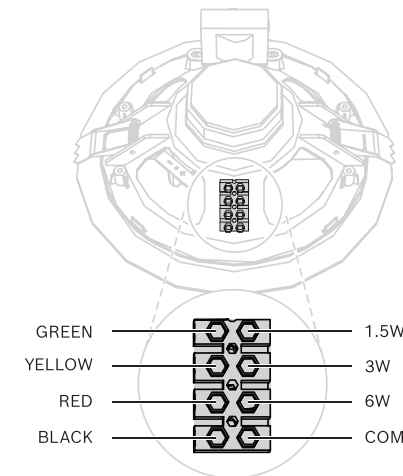

5 |

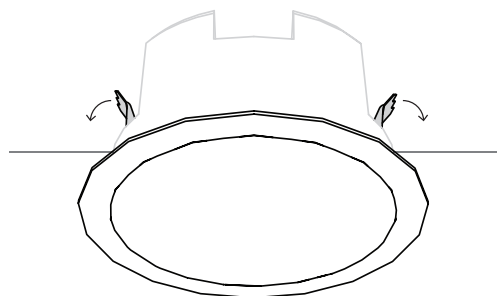


6 |

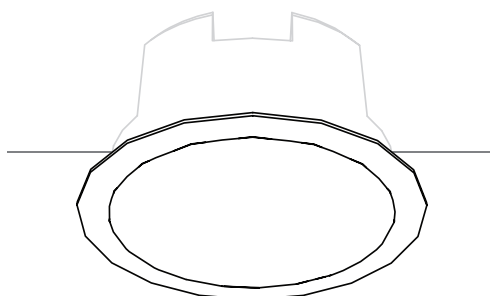

7 |




LC9-UC06B

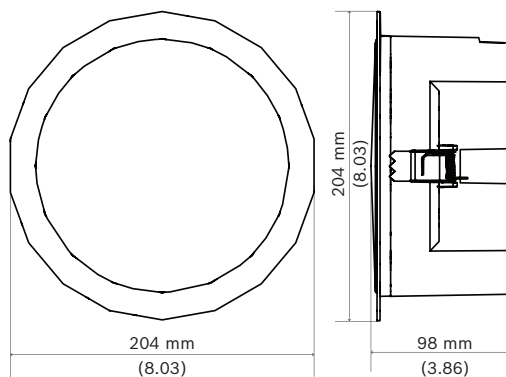


8 |




LC9-UC06

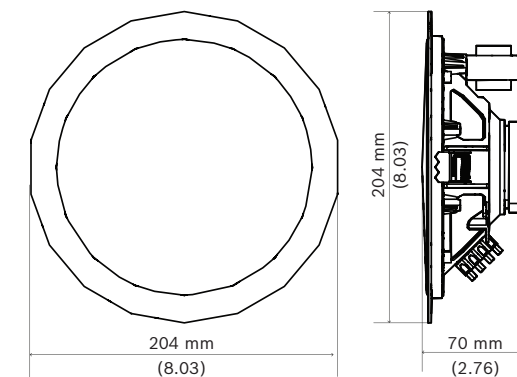

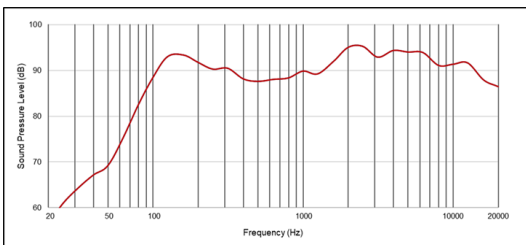LC9-UC06

Power handling	6 W
Rated Frequency Range (-10 dB)	80 Hz - 20 kHz
Frequency Response (Peak -20 dB) ⁽¹⁾	65 Hz - 20 kHz
Sensitivity (SPL 1 W/1 m)	92 dB
Max SPL (SPL 6 W/1 m)	100 dB

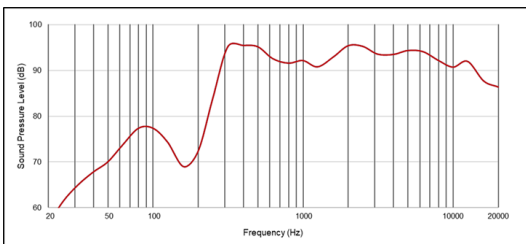
LC9-UC06B

Power handling	6 W
Rated Frequency Range (-10 dB)	235 Hz - 20 kHz
Sensitivity (SPL 1 W/1 m)	92 dB
Max SPL (SPL 6 W/1 m)	100 dB
Coverage Pattern @ 1 kHz/4 kHz (-6dB)	180° / 70°

Coverage Pattern @ 1 kHz/4 kHz (-6dB)	180° / 70°
Rated Impedance	1667 Ω@6 W 3333 Ω@3 W 6667 Ω@1.5 W
Input Configuration	100 V
Transformer Taps	6, 3, 1.5 W
Dimensions (Diameter x Height)	204 x 70 mm
Net Weight	0.6 kg
Shipping Weight (6 units)	4.2 kg
Color	White (RAL 9003)
Approvals	CE, IEC 62368-1
Operating temperature	-25 °C to +55 °C (-13 °F to +131 °F)
Storage temperature	-40 °C to +70 °C (-40 °F to +158 °F)

Rated Impedance	1667 Ω@6 W 3333 Ω@3 W 6667 Ω@1.5 W
Input Configuration	100 V
Transformer Taps	6, 3, 1.5 W
Dimensions (Diameter x Height)	204 x 98 mm
Net Weight	0.72 kg
Shipping Weight (6 units)	4.8 kg
Color	White (RAL 9003)
Approvals	CE, IEC 62368-1

Relative humidity	<95%
-------------------	------

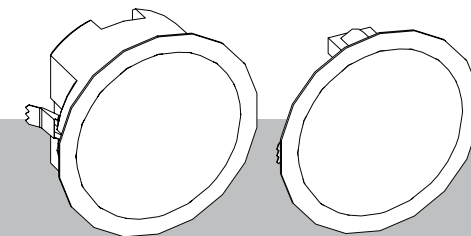Ceiling Loudspeakers
 LC9-UC06 | LC9-UC06B


en Quick installation guide

Bosch Security Systems B.V.

Torenallee 49
5617 BA Eindhoven
Netherlands

www.boschsecurity.com

© Bosch Security Systems B.V., 2021

Building solutions for a better life.