


SKI-100L-LSN LSN bolt contact, inner door

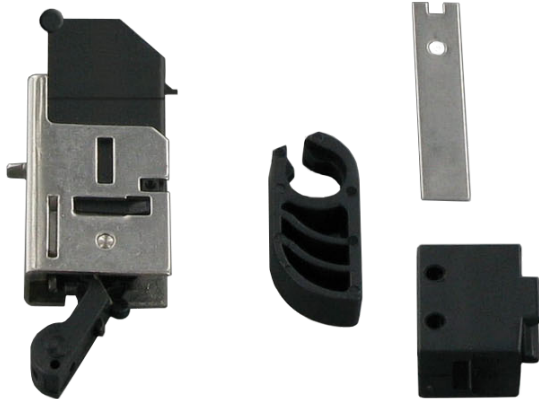

Bolt contacts are used for monitoring locking of doors.

Regulatory information

Region	Regulatory compliance/quality marks	
Germany	VdS	G120039 SKI-100L-LSN, SKA-100L-LSN

Installation/configuration notes

Installation considerations

- Installation is done in the door frame with the bolt contact being activated by the door locking bolt. Only the second turn of the key in the lock activates the contact. To make any necessary adjustments, adjust the actuator of the bolt contact.
- When installing in fire protection doors, make sure that no mechanical changes, except for the fastener bores, are carried out on the door frames.

Connecting LSN


- Each LSN contact is a physical LSN address
- The length of LSN contact connection cables must be included when planning the total cable length of the LSN loop or stub
- Passive coupling elements for joining the connection cables to the installation cable must be placed as close as possible to the LSN contacts

Testing LSN contacts

- Reed switch and microswitch functions can be checked before installation by a multimeter or continuity checker (for diode paths)

- ▶ Bolt contact in LSN technology
- ▶ VdS class C

- The resistance values are approximate values; a large change in resistance is significant here

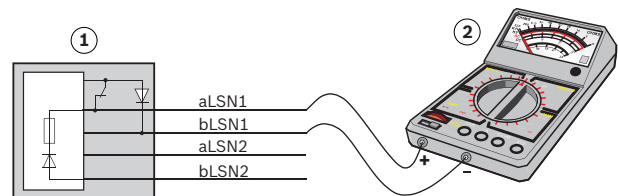

- 1 Detector
- 2 Multimeter
Contact open: approx. 3 MΩ
Contact closed: approx. 1 MΩ

Only the intrusion contact can be checked in this way. The tamper switch of the Class C magnetic contact can be checked by the intrusion panel

Parts included

Quantity	Component
1	Bolt contact for inner doors, without cable

Technical specifications

Electrical

Operating voltage (VDC)	15 VDC – 33 VDC
Current consumption (mA)	0.40 mA

Mechanical

Installation type	Build in
Material	Stainless Steel
Color	Gray
Dimensions (H x W x D) (mm) Without operating lever	37 mm x 10 mm x 19 mm
Dimensions (H x W x D) (mm) With operating lever	74 mm x 10 mm x 19 mm

Environmental

Environmental class (VdS 2110)	II
IP rating	IP54
Operating temperature (°C)	-25 °C – 55 °C

Ordering information**SKI-100L-LSN LSN bolt contact, inner door**

LSN bolt contact for inner door use.

Order number **SKI-100L-LSN | F.01U.391.654****Accessories****SK-100L-LP Bolt contact, accessory plate, 10 pcs**

Wider actuating plate for bolt contact

Order number **SK-100L-LP | F.01U.418.729****Represented by:**

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Tel.: +49 (0)89 6290 0
Fax: +49 (0)89 6290 1020
de.securitysystems@bosch.com
www.boschsecurity.com

North America:
Bosch Security Systems, LLC
130 Perinton Parkway
Fairport, New York, 14450, USA
Phone: +1 800 289 0096
Fax: +1 585 223 9180
onlinehelp@us.bosch.com
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
Phone: +65 6571 2808
Fax: +65 6571 2699
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com