


B10R Enclosure, medium, red

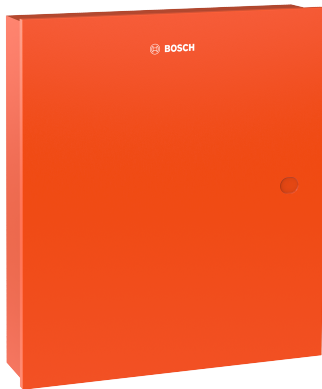

The B10R Medium Control Panel Enclosure is a red enclosure made of cold-rolled steel that is 1.0 mm (20 gauge) thick. It houses many different Bosch control panels and modules. The enclosure holds one 18Ah battery or two batteries (up to 7Ah). It is compatible with the following accessories:

- **D101 Lock and Key Set.** Standard lock set with one key supplied. Uses the D102 (#1358) replacement key.
- **D110 Tamper Switch.** Screw-on tamper switch that fits all enclosures. Shipped in packages of two.
- **ICP-EZTS Dual Tamper Switch.** Combination tamper switch with a wire loop for additional tamper outputs.

Regulatory information

Region	Regulatory compliance/quality marks	
USA	CSFM	7300-1615-0506
	FDNY-CoA	6307 B465_NYC_CoA_6307
	UL	S1871-19850314-CertificateofCompliance
	UL	UL 985 - Household Fire Warning System Units (6th edition)
	UL	UL 864 - Standard for Control Units and Accessories for Fire Alarm Systems (10th edition)



- ▶ Easy to install standoff locations for mounting supporting modules
- ▶ Made with cold-rolled steel with a red matte finish for fire applications
- ▶ Easy access mounting locations for optional transformers
- ▶ Punch outs for optional B46 External Annunciator (for B465 only)

Region	Regulatory compliance/quality marks	
Canada	ULC	[D8108A, D8108AH, D8109, D8109G, D8109H, D8109L, B8103, D8103, B12, B10, B10R, B11, B11R]

Installation/configuration notes

Compatibility

Devices	B46 External Annunciator D101 Lock and Key Set ICP-EZTS Tamper Switch Set D110 Tamper Switch
---------	---

Parts included

Quantity	Component
1	Enclosure
1	Hardware pack
1	Installation Manual

Technical specifications

Environmental considerations

Mounting considerations	Mount in dry indoor locations.
-------------------------	--------------------------------

Mechanical

Color	Red
Dimensions (H x W x D) (cm)	35.60 cm x 31.80 cm x 7.60 cm
Dimensions (H x W x D) (in)	14 in x 12.50 in x 3 in
Material	Steel

Ordering information

B10R Enclosure, medium, red

Red, steel enclosure. Accepts an optional lock and tamper switch.

Order number **B10R | F.01U.309.510**

Accessories

D101 Enclosure lock and key set

Short-body lock set with one key supplied. Uses the D102 (#1358) replacement key.

Order number **D101 | 4.998.800.200**

ICP-EZTS Dual tamper switch

Combination tamper switch with a wire loop for additional tamper outputs.

Order number **ICP-EZTS | F.01U.217.038**

D110 Tamper switch for enclosure, 2pcs

Screw-on tamper switch that fits all enclosures. Shipped in packages of two.

Order number **D110 | 4.998.137.947 F.01U.246.707**

Represented by:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Platz 1
D-70839 Gerlingen
www.boschsecurity.com

North America:
Bosch Security Systems, LLC
130 Perinton Parkway
Fairport, New York, 14450, USA
www.boschsecurity.com

Asia-Pacific:
Robert Bosch (SEA) Pte Ltd, Security Systems
11 Bishan Street 21
Singapore 573943
www.boschsecurity.com/xc/en/contact/
www.boschsecurity.com