


ICP-EZTS Sabotagekontakt med dubbelfunktion

www.boschsecurity.com



BOSCH

Invented for life

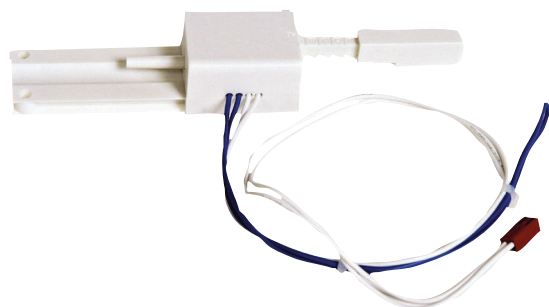

- ▶ Den dubbelverkande sabotagekontakten registrerar vid öppning och om kapslingen tas bort från väggen
- ▶ Inklusive en extra anslutning för fler sabotageutgångar

Certifikat och godkännanden

Region	Överensstämmelse med regelverk/kvalitetsmärkning	
USA	ANSI-SIA	CP-01-2010-Control Panel Standard - Features for False Alarm Reduction
Europa	CE	1999/5/EC, 2006/95/EC, 2004/108/EC
USA	UL	
	UL	UL 365 - Police Station Connected Burglar Alarm Units
	UL	UL 464 - Standard for Audible Signal Appliances
	UL	UL 609 - Standard for Local Burglar Alarm Units and Systems
	UL	UL 985 - Household Fire Warning System Units
UL	UL 1023 - Household Burglar Alarm System Units	
UL	UL 1076 - Proprietary Burglar Alarm Units and Systems	
UL	UL 1610 - Central Station Burglar Alarm Units	

Region	Överensstämmelse med regelverk/kvalitetsmärkning	
	UL	UL 1635 - Standard for Digital Alarm Communicator System Units
	CSFM	- California Office of The State Fire Marshall
Kanada	ULC	CAN/ULC S303 - Local Burglar Alarm Units and Systems
	ULC	CAN/ULC S304 - Standard for Signal Receiving Center and Premise Burglar Alarm
	ULC	CAN/ULC S545 - Residential Fire Warning System Control Units
	ULC	ULC-ORD C1023 - Household Burglar Alarm System Units
	ULC	ULC-ORD C1076 - Proprietary Burglar Alarm Units and Systems

Delar som medföljer

Antal	Komponent
1	Sabotagekontakt
1	Vägguttag

Antal	Komponent
1	Maskinvarupaket
1	Installationshandbok

Tekniska specifikationer

Vikt	0,033 kg
Färg	Vit

Beställningsinformation

ICP-EZTS Sabotagekontakt med dubbelfunktion
Sabotagekontakt med dubbelfunktion med extra anslutning för externa sabotageslingor.
Ordernummer **ICP-EZTS**

Representerad av:

Europe, Middle East, Africa:
Bosch Security Systems B.V.
P.O. Box 80002
5600 JB Eindhoven, The Netherlands
Phone: + 31 40 2577 284
emea.securitysystems@bosch.com
emea.boschsecurity.com

Germany:
Bosch Sicherheitssysteme GmbH
Robert-Bosch-Ring 5
85630 Grasbrunn
Germany
www.boschsecurity.com