

## NDS-5703-F360LE Fixed dome 6MP 360° IP66 IR

### FLEXIDOME panoramic 5100i IR



- ▶ 360° panoramic overview in 6MP resolution without blind spots
- ▶ Optimized for all lighting conditions with integrated IR and High Dynamic Range
- ▶ Edge or client-side dewarping for easy integration and flexible viewing and recording
- ▶ Built-in IVA Pro Buildings, IVA Pro Perimeter and Intelligent Audio Analytics to trigger relevant alerts and quickly retrieve data
- ▶ Compact design protected against vandalism and all weather conditions

The NDS-5703-F360LE is a discreet and aesthetic panoramic camera for indoor and outdoor surveillance.

Its stereographic, panoramic lens provides full 360° coverage without blind spots, ideal for surveillance applications that require wide area coverage in a single, detailed view. The camera offers full situational awareness and simultaneous high-resolution zoomed-in images. The high-end system on chip (SoC) provides dewarping for easy integration and flexible viewing and recording. Built-in Intelligent Video Analytics Pro (IVA Pro) enriches full situational awareness and triggers relevant alerts.

Intelligent Audio Analytics gives meaning to the sounds it captures.

The camera's integrated IR provides the flexibility to control IR intensity in multiple zones to prevent IR saturation. Additionally, with its wide range of inputs and outputs, such as Alarm and HDMI, it can be used for any application.

The camera has an IK10 and IP66 design to protect itself against vandalism and all weather conditions.

#### Functions

##### 6MP sensor resolution

The camera offers a 6MP sensor to optimize the details required. This offers 30 fps to ensure real-time motion in your scenes. Together with its stereographic lens the image circle offers a 4.5MP effective resolution.

##### Panoramic vision and Intelligent Video Analytics Pro (IVA Pro)

Combining Bosch Intelligent Video Analytics Pro (IVA Pro) software with full panoramic vision, produces an extremely powerful surveillance tool, which enriches full situational awareness. With intelligent tracking, movement can be followed continuously throughout the full image circle. There is no need to hand off tracking from one camera to another, greatly simplifying movement analysis.

The system reliably detects, tracks, and analyzes objects, and alerts you when predefined alarms are triggered. A smart set of alarm rules makes complex tasks easy and reduces false alarms to a minimum. Specifically designed for the most demanding environments. It is extremely resistant to false triggers caused by challenging environments with snow, wind (moving trees), rain, hail, and water reflections.

Calibration is quick and easy -IVA Pro Perimeter in 3D tracking mode only requires entering the mounting height of the camera. The internal gyro/accelerometer sensor provides the rest of the

information to precisely calibrate the video analytics. For IVA Pro Buildings effort is minimized, eliminating the need for calibration.

### Camera Trainer

Based on examples of target objects and non-target objects, the Camera Trainer program uses machine learning to allow the user to define objects of interest and generate detectors for them. In contrast to the moving objects that the Intelligent Video Analytics application detects, the Camera Trainer program detects both moving and non-moving objects and classifies them immediately. Using Configuration Manager, you can configure the Camera Trainer program using both live video as well as recordings available through the respective camera. The resulting detectors can be downloaded and uploaded for distribution to other cameras. A free of charge license is required to activate the Camera Trainer program.

### Intelligent Audio Analytics

The device has an integrated microphone array with three digital microphones for Intelligent Audio Analytics. This is a powerful AI-driven audio signal processing algorithm built to detect and identify target sounds from the ambient sound. It is powered by SoundSee technology and developed to improve operations of the International Space Station (ISS). A set of sound detectors identify sound events such as gunshot (perpetual license) and T3 / T4 alarms (pre-installed). The sound detectors trigger an alarm functionality to alert the operator when the sound event matches an audio signature of a sound detector. Without the need to record audio, Intelligent Audio Analytics generates metadata that is seamlessly integrated with Bosch' Intelligent Video Analytics metadata stream.

The device is not only able to classify sounds, but also to provide an approximate location of the sound. If required by local laws, the microphone can be permanently blocked via a secure license key. As Intelligent Audio Analytics is under development, the available Sound Detectors and features will depend on the camera FW version.

### Dewarping

The lens captures a circular image. Our dewarping software transforms this circular image into several different distortion-free rectangular views. To facilitate system integration, you can choose edge dewarping inside the camera or client-side dewarping on an external platform.















The edge dewarping in the camera provides three separate video channels simultaneously:

- Full image circle (Video 1 channel)
- Dewarped view mode (Video 2 channel)
- E-PTZ (Video 3 channel)

Different view modes can be selected for the video 2 channel. Your selection depends on the resolution you require and how you wish to view the dewarped image.

### View modes

The following view modes can be select in the camera or on the client:

|                                      | Full image cut-out and displayed image  |   |
|--------------------------------------|---|---|
| Panoramic view (ceiling mount)       |    |    |
| Panoramic view (for 180° wall mount) |    |    |
| E-PTZ view                           |    |    |
| Full panoramic view                  |   |   |
| Quad view                            |  |  |
| Double panoramic view                |  |  |
| Corridor view (ceiling mount)        |  |  |

### HDMI output

The camera has HDMI output up to 1080p resolution for live streaming to a public view monitor, ideal for retail usage or for local video display. Via its micro HDMI connector, the camera can display the full image circle.

It also offers the flexibility to display both warped and dewarped images, including quad view and ePTZ.

### High Dynamic Range

The camera has High Dynamic Range. This is based on a multiple-exposure process that captures more details in the highlights and in the shadows even in the same scene. The result is that you can easily distinguish objects and features, for example, faces with bright backlight.

The actual dynamic range of the camera is measured using Opto-Electronic Conversion Function (OECF) analysis according to IEC 62676 Part 5. This method is used to provide standardized measurements, which can be used to compare different cameras.

### DORI coverage

DORI (Detect, Observe, Recognize, Identify) is a standard system (EN-62676-4) for defining the ability of a person viewing the video to distinguish persons or objects within a covered area. The maximum distance at which a camera/lens combination can meet these criteria is shown below:

When mounted at 3 m (10 ft) height the camera has the following coverage radius for the four DORI levels for a person in the scene:

| DORI      | DORI definition     | Coverage radius |
|-----------|---------------------|-----------------|
| Detect    | 25 px/m (8 px/ft)   | 28 m/ 93 ft     |
| Observe   | 63 px/m (19 px/ft)  | 11.5 m/ 38 ft   |
| Recognize | 125 px/m (38 px/ft) | 5.5 m/ 18 ft    |
| Identify  | 250 px/m (76 px/ft) | 2.1 m/ 7 ft     |



### E-PTZ and regions of interest

The remote E-PTZ (Electronic Pan, Tilt and Zoom) controls allow you to select specific areas of the full image circle. These Regions of Interest (ROI) can be easily defined, allowing the most interesting part of a scene to be monitored separately. The high resolution ensures that details are not lost even when using the electronic zoom.

The E-PTZ feature of a panoramic camera has some advantages over normal PTZ cameras. There is no camera movement so the camera does not draw attention to itself or appear intrusive. Situational awareness is still retained even when zooming in on a particular object of interest. The smooth E-PTZ function helps navigation, and presets are available for setting up a guard tour.

Intelligent tracking is also available to track people through the entire view of the camera.

### Record exactly what you want

The camera provides the full resolution circular image for recording even if you are viewing only a portion of the scene. This means that you can always perform retrospective dewarping and analysis on the complete area covered and then zoom in on the region or object of interest.

With edge-dewarping you can also choose to only record the relevant parts of the scene which helps reduce bitrates significantly.

### Scene modes

The camera has a very intuitive user interface that allows fast and easy configuration. Multiple preset configurable modes are provided with the best settings for a variety of applications. Different scene modes can be selected for different situations, such as sodium lighting or dark environments.

### Edge recording

Insert a memory card into the card slot to store up to 2 TB of local alarm recording. Pre-alarm recording in RAM reduces recording bandwidth on the network, and extends the effective life of the memory card. It has advanced edge recording providing a reliable storage solution possible due to the combination of these functions:

- Industrial SD card support allows for extreme lifetime
- Health monitoring of industrial SD cards provide early service indications.

### Data security

Special measures have been put in place to ensure the highest level of security for device access and data transport. The three-level password protection with security recommendations allows users to customize device access. Web browser access can be protected using HTTPS and firmware updates can also be protected with authenticated secure uploads. The cameras have built-in Secure Element (SE) hardware providing main Trusted Platform Module (TPM) functionality to ensure the highest levels of

data security and privacy protection. Together with Public Key Infrastructure (PKI) support, superior protection from malicious attacks is guaranteed. It also supports 802.1x network authentication with EAP/TLS and RSA encryption key lengths of up to 4096 bits, ensuring data safety beyond 2030. The advanced certificate handling offers:

- Bosch origin device certificate pre-installed
- Self-signed unique certificates automatically created when required
- Client and server certificates for authentication
- Client certificates for proof of authenticity
- Certificates with encrypted private keys

#### Modular accessories

A full line of modular accessories is available that allows a consistent design across different cameras and a wide range of installation possibilities. Available options include wall or pipe mount, a surveillance cabinet with power and fiber optic options, and an in-ceiling mounting kit. There is also a conduit adapter available for installations on concrete walls or ceilings.

#### Intelligent streaming

Smart encoding capabilities, utilizing video analytics, reduce bandwidth consumption to extremely low levels. Only relevant information in the scene, such as motion or objects found through analytics, needs to be encoded. The camera is capable of quad streaming, allowing it to deliver independent and configurable streams for live viewing, recording, or remote monitoring via constrained bandwidths. Each of these streams can be adapted independently to deliver high-quality video, perfectly tailored to purpose, while reducing bit rate by up to 90% compared to a standard camera.

#### System integration and ONVIF conformance

The camera conforms to the ONVIF Profile S, ONVIF Profile G, ONVIF Profile M, and ONVIF Profile T specifications. For H.265 configuration, the camera supports Media Service 2, which is part of ONVIF Profile T. Compliance with these standards guarantees interoperability between network video products regardless of manufacturer. Third-party integrators can easily access the internal feature set of the camera for integration into large projects. Visit the Bosch Integration Partner Program (IPP) website ([ipp.boschsecurity.com](http://ipp.boschsecurity.com)) for more information.

#### Bosch Remote Portal

With the secure cloud infrastructure, Remote Portal, you can manage your connected Bosch devices. From the Remote Portal you can:

- Complete initial configuration of your connected Bosch devices (online or offline).
- Update firmware for single or multiple devices.
- Manage certificates.

- Monitor the health of your connected Bosch devices.

#### Two-way audio and built-in microphone

Two-way audio allows the operator to communicate with visitors or intruders via an external audio line input and output. Alternatively, there is an integrated microphone to capture crisp and clear audio. By using the integrated or external microphone, audio detection can be used to generate alarms to alert the security operator quicker and act more proactively. If required by local laws, the microphone can be blocked via a secure license key.

#### Resists rain, dust, and tampering with reliable operation across a wide temperature range

Suitable for indoor and outdoor usage. The robust design of the camera is rated to IP66 and IK10 standards, safeguarding the camera against rain and dust while also offering protection against vandalism and tampering.

The camera can operate in a wide ambient temperature range between -40 °C up to +55 °C / -40 °F up to 131 °F.

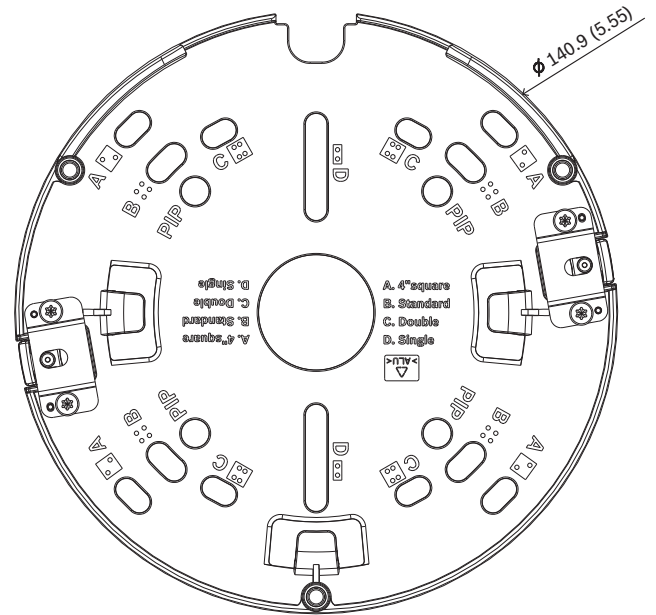
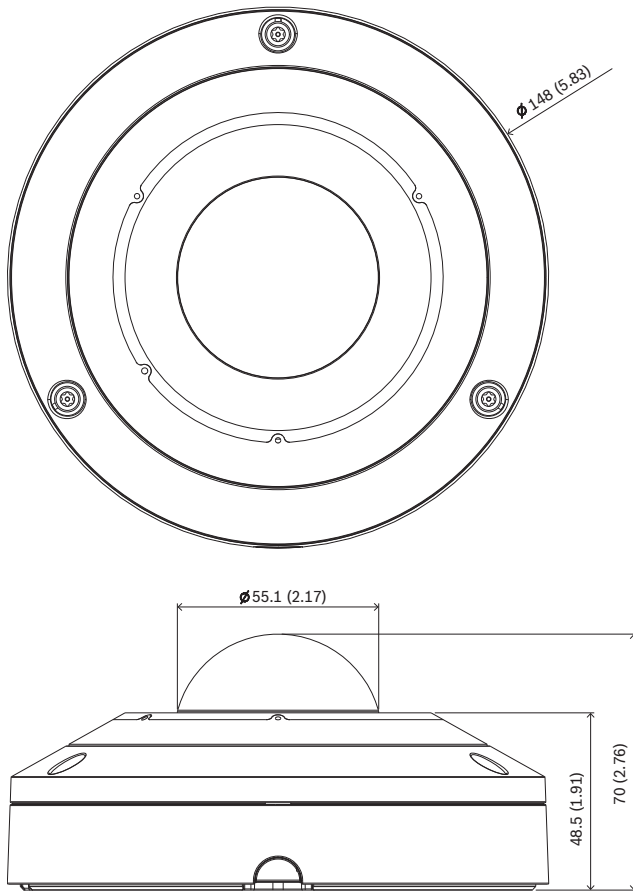
| Regulatory information |   |
|------------------------|---|
| Standards              | Type  |
| Emission               | EN 55032<br>EN 50121-4<br>CFR 47 FCC part 15, Class A   |
| Environmental          | EN IEC 63000: 2018<br>EN 50130-5: 2011<br>RoHS EU, 2011/65/EU and 2015/863/EU<br>WEEE EU, 2012/19/EU<br>NEMA TS-2 chapter 2.1 |
| Immunity               | EN 50130-4  |
| Marks                  | CE, FCC, UL, WEEE, RCM, VCCI, CMIM, UKCA, China RoHS, BIS   |
| Safety                 | EN 62368-1<br>EN 60950-22<br>UL 60950-22<br>UL 62368-1, 3rd edition<br>CSA C22.2 No. 62368-1-14, 3rd edition                  |
| Image performance      | IEC 62676-5   |
| ONVIF conformance      | EN 50132-5-2, EN 62676-2  |
| Impact protection      | EN 62262 (IK10)   |
| Ingress protection     | EN 60529 (IP66) and UL50E (NEMA Type 4X)  |

| Standards   | Type      |
|-------------|-----------|
| IR lighting | IEC 62471 |

| Region        | Regulatory compliance/quality marks            |
|---------------|--|
| Europe        | CE   |
| Global        | IEC 62443 Industrial Cyber Security Capability |
| USA           | UL CAP Cybersecurity Assurance Program         |
| Great Britain | UKCA   |

**Installation/configuration notes**



Dimensions in mm (inch)

**Parts included**

| Quantity | Component                                    |
|----------|--|
| 1        | Mount plate                                  |
| 1        | Camera base                                  |
| 1        | Camera dome cover                            |
| 1        | TR20 Allen key for camera installation       |
| 1        | 8-pin Audio and I/O connector                |
| 1        | 2-pin power connector                        |
| 1        | RJ-45 punch-through aid                      |
| 2        | M20 rubber grommets (attached to the camera) |
| 1        | Quick installation guide                     |
| 1        | Safety information                           |
| 3        | Installer UX labels                          |

**Technical specifications**

**Electrical**

|           |  |
|-----------|--|
| PoE input | PoE; PoE IEEE 802.3af / 802.3at Type 1, Class 3; PoE IEEE 802.3af<br>PoE and auxiliary power can be connected simultaneously for redundant operation |
|-----------|--|

|   |                |
|---|----------------|
| Input voltage (VAC)                           | 24 VAC. ±10%   |
| Input voltage (VDC)                           | 12 VDC. ±10%   |
| Power consumption PoE (W) (typical – maximum) | 5.6 W – 11.4 W |

### Sensor

|                          |                       |
|--------------------------|-----------------------|
| Total sensor pixels      | 6 MP approx.          |
| Sensor type              | 1/1.8 inch CMOS       |
| Effective pixels (H x V) | 2,112 x 2,112(4.5 MP) |

### Sensitivity

|  |           |
|--|-----------|
| Color (lx) (sensitivity measured according to IEC 62676 Part 5)                        | 0.0990 lx |
| Monochrome (lx) (sensitivity measured according to IEC 62676 Part 5)                   | 0.0080 lx |
| Minimum illumination with IR (lx) (sensitivity measured according to IEC 62676 Part 5) | 0.0 lx    |
| High Dynamic Range (HDR) (dB)  | 120 dB    |
| Measured according to IEC 62676 Part 5 (dB)  | 105 dB    |

### Optical

|                              |                           |
|------------------------------|---------------------------|
| Lens                         | 1.155 mm fixed-focus lens |
| Lens mounting                | Board                     |
| Lens aperture (/F)           | 2.0 /F                    |
| Iris control                 | Fixed iris                |
| Day / Night                  | Switchable IR-cut filter  |
| Field of View fixed lens (°) | 182° x 182°               |
| Minimum object distance      | 0.1 m                     |

### Night vision

|                                    |                                       |
|------------------------------------|---------------------------------------|
| Maximum detection distance IR (m)  | 20 m                                  |
| Maximum detection distance IR (ft) | 66 ft                                 |
| LED                                | 360 LED high efficiency array, 850 nm |
| IR intensity                       | 5 controllable zones                  |

### Video streaming

|                   |   |
|-------------------|---|
| Video compression | H.264 (ISO/IEC 14496-10); M-JPEG; H.265/HEVC  |
| Streaming         | Multiple configurable streams in H.265; H.264 and M-JPEG; Configurable framerate and bandwidth; Region of Interest (ROI); Multiple channels with edge dewarping |
| Overall IP Delay  | Min. 120 ms, Max. 340 ms  |
| GOP structure     | IP; IBP; IBBP   |
| Frame rate (fps)  | 1 fps – 30 fps  |
| Encoder regions   | Eight independent areas for setting encoder quality to optimize bitrate   |

### Video resolution (H x V)

|                 |  |  |
|-----------------|--|--|
| Video 1 channel | Full image circle  | 2112 x 2112 (4.5 MP)                         |
| Video 2 channel | Various dewarped modes (Full panoramic, double panoramic, quad, corridor, E-PTZ) | Resolution depends on selected dewarped mode |
| Video 3 channel | E-PTZ  | Up to 1920 x 1080                            |

Multiple lower resolutions available and individually selectable per channel and stream

### Video functions

|                        |   |
|------------------------|---|
| Shutter modes          | Automatic Electronic Shutter (AES); 1/25 min; Default shutter; 1/30 min (1/30 [1/25] to 1/500) selectable<br>Max. shutter speed 1/1.875 to 1/150000   |
| Day/night modes        | Auto (adjustable switch points); Color; Monochrome  |
| Backlight compensation | On/Off  |
| Camera functionality   | Geolocation; Region of interest; Audio detection; Backlight compensation (BLC); Intelligent auto exposure; Intelligent dynamic noise reduction; Contrast enhancement; Sharpness enhancement; Intelligent defog; Pixel counter; Tamper detection; Saturation; Brightness; Display stamping; Location |
| White balance (K)      | 2,500 K – 10,000 K  |



|                         |   |
|-------------------------|---|
| White balance modes     | 3 automatic modes (Basic, Standard, Sodium vapor); Manual mode; Hold mode |
| Number of privacy masks | 8 independent areas, fully programmable                                   |
| Number of pre-positions | 6 independent sectors   |
| Scene modes             | Multiple default modes with scheduler                                     |
| Display stamping        | Individual names and stamps for all video channels                        |

### Video content analysis

|                     |   |
|---------------------|---|
| Analysis type       | Camera trainer; Intelligent Video Analytics Pro: IVA Pro Buildings; Intelligent Video Analytics Pro: IVA Pro Perimeter  |
| Alarm triggers      | Any object; Object in field; Line crossing; Enter / leave field; Loitering; Follow route; Idle / removed object; Counting; Occupancy; Condition change; Similarity search |
| Object classes      | IVA Pro Buildings: Person, Vehicle<br>IVA Pro Perimeter: Bicycle, Motorcycle, Truck, Bus  |
| Object filters      | Duration; Size; Aspect ratio; Speed; Direction; Color, Object classes   |
| Tracking modes      | IVA Pro Buildings: Base tracking (2D)<br>IVA Pro Perimeter: Perimeter tracking (2D); Perimeter tracking (3D); People tracking (3D); Museum mode (2D); Ship tracking (2D)  |
| Calibration         | IVA Pro Buildings: No calibration<br>IVA Pro Perimeter: Automatic based on gyro sensor, focal length, and camera height (for 3D tracking)                                 |
| Supported analytics | IVA Pro Privacy (Free)  |
| Audio AI            | T3 / T4 alarm detection (pre-installed)<br>Gunshot detection (licensed)   |

### Storage

|                  |                         |
|------------------|-------------------------|
| Internal storage | 5-s-pre-alarm-recording |
|------------------|-------------------------|

|                     |  |
|---------------------|--|
| Memory card slot    | Micro SDXC; SDHC; SD   |
| Industrial SD cards | Extreme lifetime and health monitoring support that provides early service indication (if supported by the DS card)<br>Health monitoring will be available with a future firmware version. |

### Inputs and outputs

|                                |  |
|--------------------------------|--|
| Ethernet                       | Shielded RJ45  |
| Microphone                     | Integrated array with 3 digital MEMS audio sensors   |
| Audio line in                  | 0.707 Vrms max, 10 kOhm typical  |
| Audio line out                 | 0.707 Vrms at 16 Ohm typical   |
| Alarm inputs                   | 1  |
| Alarm input activation         | Short or DC 5V activation  |
| Alarm outputs                  | 1  |
| Alarm output voltage           | 30 VDC, max. load 0.5 A  |
| Fiber optics (sold separately) | The Fiber Optic Ethernet Media Converter kit (VG4-SFPSCKT) installed inside a Surveillance Cabinet (NDA-U-PA0, NDA-U-PA1 or NDA-U-PA2) provides the fiber optic interface to the mounted camera. |

### Audio

|                                    |   |
|------------------------------------|---|
| Compression and sampling rate      | G.711 8 kHz; L16 16 kHz; AAC-LC, 96 kbps at 32/48 kHz |
| Audio input                        | Built-in microphone; Line-in; Mic-level input         |
| Audio output                       | Line-out  |
| Minimum signal-to-noise ratio (dB) | >50 dB  |
| Audio streaming                    | Full duplex; Half duplex                              |

### Network

|                       |   |
|-----------------------|---|
| Protocols / standards | IPv4; IPv6; UDP; TCP; HTTP; HTTPS; RTP/RTCP; IGMP V2/V3; ICMP; ICMPv6; RTSP; FTP; ARP; DHCP; APIPA (Auto-IP, link local address); NTP (SNTP); SNMP (V1, MIBII); SNMP (V3, MIBII); 802.1x, EAP/TLS; DNS; DNSv6; DDNS |
|-----------------------|---|

|               |   |
|---------------|---|
|               | (DynDNS.org, selfHOST.de, no-ip.com); SMTP; iSCSI; UPnP (SSDP); DiffServ (QoS); LLDP; SOAP; CHAP; Digest authentication |
| Ethernet type | 10/100/1000BASE-T; Auto-sensing; Full / half duplex   |
| Conformity    | ONVIF Profile S; ONVIF Profile G; ONVIF Profile T; ONVIF Profile M  |
| Connectivity  | Auto MDIX   |

### Platform

|                         |                          |
|-------------------------|--------------------------|
| Common Product Platform | CPP14                    |
| Memory (RAM) (MB)       | 2,048 MB; 8,192 MB flash |

### Data security

|                          |  |
|--------------------------|--|
| Crypto coprocessor (TPM) | RSA 4096 bit; AES/CBC 256 bit          |
| PKI                      | X.509 certificates; SCEP protocol      |
| End-to-end encryption    | Full end-to-end with supported VMS     |
| Encryption               | TLS 1.2; TLS 1.3; AES 128; AES 256     |
| Local storage encryption | XTS-AES                                |
| Video authentication     | MD5; SHA-1; SHA-256; SHA-512; Checksum |
| Firmware protection      | Signed firmware, secure boot           |

### Mechanical

|                            |  |
|----------------------------|--|
| Material                   | Housing: Aluminum with dehumidifying membrane and waterproof connection area |
| Bubble material            | Clear polycarbonate  |
| Bubble coating             | Clear with UV blocking anti-scratch coating                                  |
| Lens adjustment (rotation) | 355°   |
| Dimensions (Ø x H) (mm)    | 148 mm x 70 mm   |
| Dimensions (Ø x H) (in)    | 5.83 in x 2.76 in  |
| Gyroscope                  | Yes  |
| Weight (kg)                | 0.82 kg  |
| Weight (lb)                | 1.81 lb  |

|               |   |
|---------------|---|
| Color (RAL)   | RAL 9003 Signal white   |
| Mounting type | Surface-mounted ; Mounting plate included for surface mount, 4 inch square junction box, single and double gang box |
| Conduit       | Compatible with conduit back box for 3/4-inch NPT (M25) conduit side entry (sold separately)                        |

### Environmental

|   |   |
|---|---|
| Operating temperature (°C)                      | IR on: -40°C to + 50°C<br>IR off: -40°C to + 55°C   |
| Operating temperature (°F)                      | IR on: -40°F to + 122°F<br>IR off: -40°F to + 131°F |
| Storage temperature (°C)                        | -40 °C – 70 °C                                      |
| Storage temperature (°F)                        | -40 °F – 158 °F                                     |
| Operating relative humidity, non-condensing (%) | 5% – 93%  |
| Operating relative humidity, condensing (%)     | 5% – 100%   |
| Storage relative humidity (%)                   | 0% – 98%  |
| Impact protection                               | IK10  |
| IP rating                                       | IP66  |
| Degree of protection                            | NEMA type 4X  |
| Sustainability                                  | PVC free  |
| Country of origin                               | Thailand  |

### Ordering information

**NDS-5703-F360LE Fixed dome 6MP 360° IP66 IR**  
360° 6MP panoramic camera with HDR, IVA Pro Buildings, IVA Pro Perimeter, microphone array for Intelligent Audio Analytics, video output for HDMI-compatible devices, H.265, vandal and weather protection  
NDAA compliant  
Order number **NDS-5703-F360LE**

### Accessories

**NDA-5080-PIP Pendant interface plate, 148mm**  
Pendant interface plate for FLEXIDOME indoor 5100i, FLEXIDOME indoor 5100i IR, and FLEXIDOME panoramic 5100i IR  
Order number **NDA-5080-PIP**



**NDA-5080-PIPW Pendant interface plate, 148mm**

Pendant interface plate with weather cap for FLEXIDOME panoramic 5100i IR  
Order number **NDA-5080-PIPW**

**NDA-U-WMT Pendant wall mount**

Universal wall mount for dome cameras, white  
Order number **NDA-U-WMT**

**NDA-U-WMP Wall mount plate**

Back plate for universal wall mount, corner mount and pole mount, white, IP66  
Order number **NDA-U-WMP**

**NDA-U-PMT Pendant pipe mount, 12" (31cm)**

Universal pipe mount for dome cameras, 31 cm, white  
Order number **NDA-U-PMT**

**NDA-U-PMTE Pendant pipe extension, 20" (50cm)**

Extension for universal pipe mount, 50 cm, white  
Order number **NDA-U-PMTE**

**NDA-U-PMTS Pendant pipe mount, 4" (11 cm)**

Universal pendant pipe mount for dome cameras, 11 cm (4"), white  
Order number **NDA-U-PMTS**

**NDA-U-PSMB Pendant wall/ceiling mount SMB**

Surface mount box (SMB) for wall mount or pipe mount.  
Order number **NDA-U-PSMB**

**NDA-U-PMAS Pole mount adapter small**

Pole mount adapter small  
Universal pole mount adapter, white; small.  
Order number **NDA-U-PMAS**

**NDA-U-PMAL Pole mount adapter large**

Universal pole mount adapter, white; large  
Order number **NDA-U-PMAL**

**NDA-5080-PC Paintable cover, F360E, 4pcs**

Paintable cover FLEXIDOME panoramic 5100i IR  
Order number **NDA-5080-PC**

**NDA-5080-TM Tilt mount 20-deg, 148mm**

Tilt mount (20°) for FLEXIDOME IP 4000i / 5000i (IR) and FLEXIDOME panoramic 5100i IR camera families  
Order number **NDA-5080-TM**

**NDA-U-CBB Conduit back box, 148mm**

Outdoor conduit back box, 148mm, IP66 rated  
Order number **NDA-U-CBB**

**NDA-U-CMT Corner mount adapter**

Universal corner mount, white  
Order number **NDA-U-CMT**

**NDA-U-PMTG Pendant pipe mount, gang box**

Universal pipe mount, compatible with gang box installation for fixed dome cameras only, white  
Order number **NDA-U-PMTG**

**NDA-U-WMTG Pendant wall mount, gang box**

Universal wall mount, compatible with gang box installation for fixed dome cameras only, white  
Order number **NDA-U-WMTG**

**NPD-5001-POE Midspan, 15W, single port, AC in**

Power-over-Ethernet midspan injector for use with PoE enabled cameras; 15.4 W, 1-port  
Weight: 200 g (0.44 lb)  
Order number **NPD-5001-POE**

**NPD-5004-POE Midspan, 4 port x 15W, AC in**

Power-over-Ethernet midspan injector for use with PoE enabled cameras; 15.4 W, 4-ports  
Weight: 620 g (1.4 lb)  
Order number **NPD-5004-POE**

**VG4-SFPCKT Ethernet to SFP interface kit**

Ethernet media converter video transmitter/data receiver fiber optic kit for AUTODOME 7000i cameras and for the Surveillance cabinets (NDA-U-PA0, NDA-U-PA1 and NDA-U-PA2).  
Order number **VG4-SFPCKT**

**SFP-2 Fiber module, multimode, 1310nm, 2LC**

SFP Fiber Optic Module, 2 km (1.2 miles), 2 LC connectors.  
Multi-mode  
1310 nm  
Order number **SFP-2**

**SFP-3 Fiber module, single-mode, 1310nm, 2LC**

SFP Fiber Optic Module, 20 km (12.4 miles), 2 LC connectors.  
Single-mode  
1310 nm  
Order number **SFP-3**

**SFP-25 Fiber module, 1310/1550nm, 1SC**

SFP Fiber Optic Module, 2 km (1.2 miles), 1 SC connector  
Multi-mode  
1310/1550 nm  
Order number **SFP-25**

**SFP-26 Fiber module, 1550/1310nm, 1SC**

SFP Fiber Optic Module, 2 km (1.2 miles), 1 SC connector  
Multi-mode  
1550/1310 nm  
Order number **SFP-26**

**MSD-064G IP SECURITY MICROSD CARD 64GB**

64 GB industrial microSD card with health status monitoring  
Order number **MSD-064G**

**MSD-128G IP SECURITY MICROSD CARD 128GB**

128 GB industrial microSD card with health status monitoring  
Order number **MSD-128G**

**MSD-256G IP SECURITY MICROSD CARD 256GB**

256 GB industrial microSD card with health status monitoring  
Order number **MSD-256G**

**Software Options****MVC-IAA-TRIAL Trial License, 60-day**

Trial License, 60-day  
Order number **MVC-IAA-TRIAL**

**MVC-IAA-GUN Gunshot Detector License, perpetual**

Gunshot Detector License, perpetual  
Order number **MVC-IAA-GUN**

**Represented by:**

**Europe, Middle East, Africa:**

Bosch Security Systems B.V.  
P.O. Box 80002  
5600 JB Eindhoven, The Netherlands  
[www.boschsecurity.com/xc/en/contact/](http://www.boschsecurity.com/xc/en/contact/)  
[www.boschsecurity.com](http://www.boschsecurity.com)

**Germany:**

Bosch Sicherheitssysteme GmbH  
Robert-Bosch-Platz 1  
D-70839 Gerlingen  
[www.boschsecurity.com](http://www.boschsecurity.com)

**North America:**

Bosch Security Systems, LLC  
130 Perinton Parkway  
Fairport, New York, 14450, USA  
[www.boschsecurity.com](http://www.boschsecurity.com)

**Asia-Pacific:**

Robert Bosch (SEA) Pte Ltd, Security Systems  
11 Bishan Street 21  
Singapore 573943  
[www.boschsecurity.com/xc/en/contact/](http://www.boschsecurity.com/xc/en/contact/)  
[www.boschsecurity.com](http://www.boschsecurity.com)